

TRAMIGO

TRACKING & CONNECTIVITY



COMPLETE SOLUTION


TRAMIGO FCT PLUS

MAINTAIN SECURITY AND RAISE EFFICIENCY

Tramigo FCT Plus is the 4G-2G version in the best-selling FCT Series. This complete eSIM tracking solution comes with embedded connectivity and software access for easy plug & play installation. It is compatible with 9-90V, therefore suitable for a wide range of vehicles, from electric vehicles to heavy duty trucks.



TRAMIGO FCT PLUS FEATURES

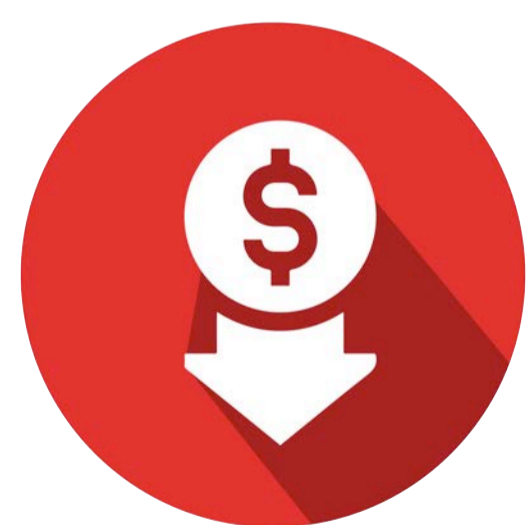

VERSATILE TRACKING SOLUTION



GPS FEATURES



HARSH ACCELERATION



IGNITION DETECTION AND DISABLING




MOTION DETECTION ALARMS



HARSH BRAKING



BUILT-IN BATTERY

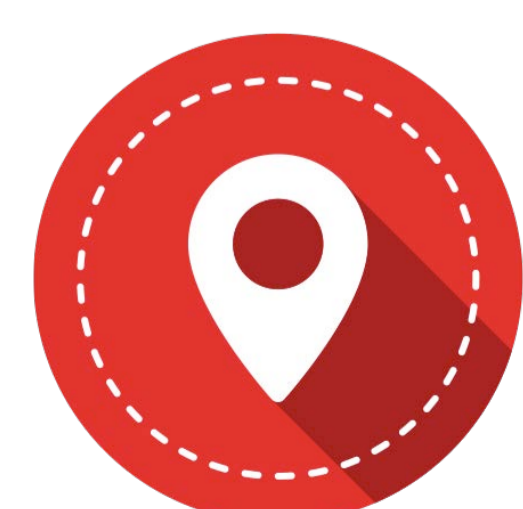

GEO-FENCE ALARMS



HARSH CORNERING

TRAMIGO SOFTWARE

Tramigo offers software solutions which allows you to monitor your vehicles at your control center or from your mobile devices:

• TRAMIGOCLOUD

TramigoCloud allows you to track your fleet behind a secure web login and puts a full control center within your reach wherever you go. With centralised updates the latest features are always immediately available to all of our security focused customers. TramigoCloud is recommended for fleet management



• TRAMIGOAPP

TramigoApp is an easy but secure way to track and monitor your vehicles anytime and anywhere. TramigoApp allows you to monitor and track your vehicles, staff, or family directly on your phone. Additional features includes trip reports, usage history reporting, geofence and setting alarms. Available for free on App Store and Google Play.



TRAMIGO FCT PLUS TECHNICAL DATA

| | |
|---|--|
| Dimension | 85(L) x 45(W) x 17(H) mm |
| Network | LTE/GSM/GPRS |
| Frequency(4G+2G) | LTE-FDD B1/B2/B3/B4/B5/B7/B8/B28/B66 GSM :850/900/1800/1900Mhz |
| Location accuracy | <5 meters CEP |
| Time To Fix (open sky) | Cold status <35s Hot status <1s |
| Working voltage | 9-36VDC |
| GPRS Protocol | Class12, TCP/IP |
| Operating temp. | -20°C to +70°C |
| Back up battery | 200mAh /3.7V Li-Polymer battery |
| Standby & Working consumption GSM/GPS Antenna | 5mA~50mA |
| Memory storage | 2000 data |
| Micro USB interface | Flash firmware/Configuration |
| Power interface | 8 PIN or 4PIN version |
| Firmware and configuration OTA | Supported |